

© Copyright 2017 HP Development Company, L.P.

Bluetooth is a trademark owned by its proprietor and used by HP Inc. under license. Intel, Celeron, and Pentium are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are trademarks of the Microsoft group of companies.

The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

First Edition (January 2017)

Document Part Number: 913328-001

Product notices

This user guide describes features that are common to most models. Some features may not be available on your computer.

This guide describes features that are common to most models. Some features may not be available on your computer.


In accordance with Microsoft's support policy, HP does not support the Windows® 8 or Windows 7 operating system on products configured with Intel and AMD 7th generation and forward processors or provide any Windows 8 or Windows 7 drivers on <http://www.support.hp.com>.

Not all features are available in all editions of Windows. This computer may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows functionality. Go to <http://www.microsoft.com> for details.

Software terms

By installing, copying, downloading, or otherwise using any software product preinstalled on this computer, you agree to be bound by the terms of the HP End User License Agreement (EULA). If you do not accept these license terms, your sole remedy is to return the entire unused product (hardware and software) within 14 days for a full refund subject to the refund policy of your seller.

For any further information or to request a full refund of the price of the computer, please contact your seller.



4. Open browser and enter the Server IP address by 192.168.100.10 to find below homepage of acer webpage management.

■ Step 3, Connect your device to projector

- Before starting the APP, user opens the WiFi settings on NB / PC / Smartphone / Tablet and find the projector name (Projector ID) which is AcerProjector_XXXXXXXX and connect it.

■ Step 4, Display

- Open the eDisplayPro APP and choose the device whose name is the same as Projector ID, then enter password shown on splash screen and enjoy display.




.....

IMPORTANT SAFETY INSTRUCTIONS

Read before operating equipment

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any of the ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and third grounding prong. The wide blade or third prong are provided for your safety. When the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12.  Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. This product may contain lead or mercury. Disposal of these materials may be regulated due to environmental considerations. For disposal or recycling information, please contact your local authorities or the Electronic Industries Alliance www.eia.org.
16. **Damage Requiring Service** - The appliance should be serviced by qualified service personnel when:
 - A. The power supply cord or the plug has been damaged; or
 - B. Objects have fallen, or liquid has been spilled into the appliance; or
 - C. The appliance has been exposed to rain; or
 - D. The appliance does not appear to operate normally or exhibits a marked change in performance; or
 - E. The appliance has been dropped, or the enclosure damaged.
17. **Tilt/Stability** - All televisions must comply with recommended international global safety standards for tilt and stability properties of its cabinets design.
 - Do not compromise these design standards by applying excessive pull force to the front, or top, of the cabinet which could ultimately overturn the product.
 - Also, do not endanger yourself, or children, by placing electronic equipment/toys on the top of the cabinet. Such items could unsuspiciously fall from the top of the set and cause product damage and/or personal injury.
18. **Wall or Ceiling Mounting** - The appliance should be mounted to a wall or ceiling only as recommended by the manufacturer.
19. **Power Lines** - An outdoor antenna should be located away from power lines.
20. **Outdoor Antenna Grounding** - If an outside antenna is connected to the receiver, be sure the antenna system is grounded so as to provide some protection against voltage surges and built up static charges. Section 810 of the National Electric Code, ANSI/NFPA No. 70-1994, provides information with respect to proper grounding of the masts and supporting structure grounding of the lead-in wire to an antenna-discharge unit, size of grounding connectors, location of antenna-discharge unit, connection to grounding electrodes and requirements for the grounding electrode. See Figure below.
21. **Objects and Liquid Entry** - Care should be taken so that objects do not fall and liquids are not spilled into the enclosure through openings.
 - a) Warning: To reduce the risk of fire or electric shock, this apparatus should not be exposed to rain or moisture and objects filled with liquids, such as water should not be placed on this apparatus.
22. **Battery Usage CAUTION** - To prevent battery leakage that may result in bodily injury, property damage, or damage to the unit:
 - Install all batteries correctly, with + and - alignment as marked on the unit.
 - Do not mix batteries (old and new or carbon and alkaline, etc.)
 - Remove batteries when the unit is not used for a long time.

EXAMPLE OF ANTENNA GROUNDING AS PER NATIONAL ELECTRICAL CODE (NEC)



Note to the CATV system installer: this reminder is provided to call the CATV system installer's attention to Article 820-40 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

7


Audio to Hi-fi System (Digital)

Audio vers chaîne haute fidélité (Numérique)

Audio al sistema Hi-fi (Digital)




SPDIF



8

PC connects to TV (as PC monitor)

L'ordinateur se connecte sur un téléviseur
(en tant que moniteur d'ordinateur)El computador (PC) se conecta al televisor
(como monitor del computador).

Bedienung der Dunstabzugshaube

- Die Schiebeschalter sind auf der rechten Oberseite des Auszugsteiles angeordnet (**Bild 1 - E**).
Die einzelnen Zahlen und Symbole haben folgende Bedeutung (von links nach rechts):

DF 6260 - CHDF 6260



 = stufenlose
Gebläseregelung


 = Intensivstufe

 = Beleuchtung

 = Beleuchtung Aus

 = Beleuchtung Ein

DF 6160 - DF 6260-ml/1



1 = Gebläsestufe 1

2 = Gebläsestufe 2

3 = Gebläsestufe 3

4 = Gebläsestufe 4

 = Beleuchtung

 = Beleuchtung Aus

 = Beleuchtung Ein

Die Gebläseregelung erfolgt durch Verschieben des Schiebeschalters. Mit dem Auszugsteil der Einbau-Dunstabzugshaube können Sie im eingeschalteten Zustand des Gerätes (Lüftermotor) das Gebläse ein- bzw. ausschalten.

Beim Herausziehen des Auszugsteiles (ohne vorhergehende Abschaltung der Einbau-Dunstabzugshaube über die Schiebeschalter) wird die eingestellte Lüfterleistung automatisch wieder eingeschaltet.

Wird das Auszugsteil ohne Betätigung der Schiebeschalter wieder eingeschoben, schaltet sich das Gebläse ab.

Die Intensivstufe (Nur DF 6260 - CHDF 6260) bei erhöhtem Wrasenanfall (Dunst) einschalten.


Die Beleuchtung kann separat mit dem Schiebeschalter ein- und ausgeschaltet werden.

Es ist ratsam, die Dunstabzugshaube einige Minuten vor Beginn des Kochens einzuschalten und sie ungefähr 15 Minuten nach dem Kochen weiterlaufen zu lassen, damit alle Gerüche sicher entfernt werden.

FRONT PANEL



REAR PANEL



CARBURETOR

The carburetor is guaranteed and serviced by the manufacturer and his distributors. Check the carburetor name plate for manufacturer.

It is important that all fuel connections be kept tight and that dirt be kept out of the carburetor. Periodically clean the carburetor flame arrester and empty any deposit out of the fuel filter sediment bowl.

The carburetors are equipped with non-adjustable high speed jets which require no attention.

The idle adjusting needles should be turned to the position where the engine idles smoothest.

FUEL PUMP


The electric fuel pump furnished with the engine is guaranteed and serviced by the manufacturer.

The "clicking" sound heard from the fuel pump is normal and should be present whenever the ignition switch is turned on.

COOLING SYSTEM

The model "283" engine is equipped with a dual water pump having rubber impellers. The two sections of the pump direct water equally to each bank of cylinders insuring proper cooling water distribution.

Cooling water is pumped first into the exhaust manifolds where it is preheated to reduce rapid temperature change and possible condensation after being routed to the cylinder block. The cooling water, after traveling the full length of the exhaust manifolds and back again, is routed into the rear end of the cylinder block. The water flows up around the cylinder bores and into the cylinder heads. After cooling the valve areas in the cylinder heads the water passes out of the front of the heads and is conducted to the after end of the engine through separate overflow passages in the manifolds. It leaves the engine traveling through the exhaust tube where it helps keep the exhaust tube cool and helps to muffle engine noise.

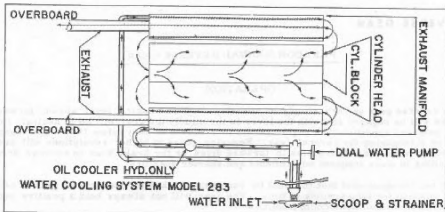

NOTE

If "AUTO" shows while you are pressing RHYTHM, change it to "MANUAL" by turning MULTI JOG to the left. In AUTO mode the tempo is automatically set and you cannot access the display of "Tempo." (More about AUTO mode later.)

2 Turn MULTI JOG.


Turning to the right speeds up the tempo. Turning to the left slows down the tempo.

(If a time-out occurs before you turn the dial, go back to the display of "Tempo" by pressing RHYTHM.)

The tempo can be changed within the limits of 81 to 160.

NOTE

The tempo of GAME is not adjustable.

To change the volume level of the rhythm pattern

- 1 Press RHYTHM repeatedly until the display reads "LEVEL X."**

**2 Turn MULTI JOG.**

Three levels, 1-3, are available.

To stop the BEAT function

Press BEAT ON/OFF.

BEAT toggles between On and Off.

NOTE


When you interrupt or stop the playback of the sound source, the BEAT function is automatically switched off.

Using the AUTO mode

The AUTO mode automatically adjusts the tempo of the current rhythm pattern so it coincides with the tempo of the music.

NOTE

Depending on the music the AUTO mode may not work correctly (with songs whose tempo is fuzzy, or is varying, for example).



You can let the music start playing before performing step 1 or later at the desired moment.

- 1 Press BEAT ON/OFF to switch the function on.**
You will hear the current rhythm pattern.
- 2 Change the rhythm pattern and the level setting as required by pressing RHYTHM and turning MULTI JOG.**
- 3 Press RHYTHM to switch the display to read "MANUAL" or "AUTO."**



- 4 Turn MULTI JOG to the right to change the display to "AUTO."**

If "AUTO" is displayed in step 3, turn MULTI JOG to the left to change the display to "MANUAL" before performing step 4.



On switching from MANUAL over to AUTO the level of the rhythm pattern is automatically reduced to "1." The preset level will be resumed when the unit takes on the tempo of the music.

While the unit is trying to get synced up to the tempo of the music, a cascade-like blue indicator will flash on the sides of the graphic equalizer display section.



When the unit gets synced up to the tempo of the music, the display will momentarily read the synced-up tempo.


Depending on sound sources (such as, songs whose tempo is varying), however, you may see different tempos appearing one after the other in the display.

Powering Off the Projector

1. Press the "Power/Standby" button to turn off the projector lamp, you will see a message "Power off the lamp?" on the on-screen display.
2. Press the "Power/Standby" button again to confirm. Otherwise the message will disappear after 5 seconds.
3. The cooling fans continue to operate for about 60 seconds for cooling cycle and the "Power/standby" button will turn orange. When the green light begins flashing, the projector has entered standby mode.
If you wish to turn the projector back on, you must wait until the projector has completed the cooling cycle and has entered standby mode. Once in standby mode, simply press "Power/Standby" button to restart the projector.
4. Disconnect the power cord from the electrical outlet and the projector.
5. Do not turn on the projector immediately following a power off procedure.

Warning Indicator

- ❖ *When the "LAMP" indicator lights solid orange for about 2 minutes. The projector will automatically shut itself down. Please contact your local reseller or service center.*
- ❖ *When the "TEMP" indicator lights solid orange, it indicates the projector has been overheated. You will see a message "Projector Overheated." on the on-screen display. The projector will automatically shut itself down.
Under normal conditions, the projector can be switched on again for your presentation. If the problem persists, you should contact your local dealer or our service center.*
- ❖ *When the "TEMP" indicator flashes orange for about 10 seconds, you will see a message "Fan Fail. Lamp will automatically turn off soon." on the on-screen display. Please contact your local dealer or our service center.*



S-Video front connection

The S-Video socket is only present on certain TV models.

You can connect S-VHS or Hi-8 audio-video equipment to the S-Video socket on the front of your TV. Ask your dealer for an appropriate cable.

- Connect your equipment to the S-Video socket of your TV.
- Press the MENU button on the remote control several times until **EXTERNAL** appears.
- Press **+** to select S-Video.
- Press MENU several times to leave the on screen menu.
- Press START or PLAY on your equipment.
- Select program number 0.
- The picture from your equipment appear on the screen.

*NOTE: If you do not see the picture from the connected equipment, use the **EXTERNAL** item in the MENU to ensure that program 0= S-Video is selected.*

Do not use the S-Video socket and the Euroconnector or Audio/Video socket at the same time.



Headphones

- Connect the headphones plug to the headphones socket on front of the TV.
- The internal loudspeakers of your TV are automatically switched off.

Tips

To clean the TV

Clean the TV using a slightly damp chamois leather.

Never use aggressive cleaning agents.

Poor or no picture:

Are the plugs tightly connected to the serial socket and are the connection facilities to any other installed TV in good condition? Do you use good quality aerial connectors and cables?

Double or black and white picture on the screen using peripheral connections:

NOTE: If you do not see the picture from the connected equipment, use the **EXTERNAL** item in the MENU to ensure that the program 0 selection is correct. Select **S-Video** (for S-VHS or Hi-8 audio-video connector) or **AV** (for euroconnector or front Audio/Video connections).



No solution:

Switch your TV off and on again with the **Ⓢ** button.

Never attempt to repair a defective TV set yourself.

Switch off the TV and call your dealer or TV-technician when nothing helps or when:

- A white horizontal stripe appears across the whole screen.
- The red lamp below the screen starts blinking when no buttons are pressed on the remote control.

Environmental information

Your TV contains material which can be recycled and reused. At end of life specialized companies can dismantle the discarded TV to concentrate the reusable materials and to minimize the amount of materials to be disposed off.

Please find out about local regulations on disposal of your old TV set.

System Components

This section is a virtual tour of the system's interior and exterior components.

Front Panel



No.	Component
1	USB 2.0 ports
2	Acer logo
3	Optical drive button
4	Optical drive button (Removable HDD bay for AM351 bezel)
5	16 in 1 Card Reader
6	Power button
7	Headphone/Speaker-out/line-out jack
8	Microphone-in jack

Regulatory Information

For your protection, this product has been tested for conformance to various national and international regulations and standards. The scope of this regulatory testing includes electrical and mechanical safety, electromagnetic emissions, immunity, acoustics and hazardous materials.

When required, approvals are obtained from third party test agencies. Approval marks appear on the product label. In addition, various regulatory bodies require some information under the headings listed in this section.

Safety

This product has not been evaluated for connection to an "IT" power system (ac distribution system having no direct connection to earth according to IEC 950).

Locate the AC outlet near the computer! The ac power cord is this product's main ac disconnect device and must be easily accessible at all times.

Battery Notice

This product contains a Lithium battery.

This battery is not to be removed or replaced by the user. If the battery needs to be replaced, contact your Hewlett-Packard authorized service personnel.

CAUTION

Lithium batteries may explode if mistreated. Do not recharge, disassemble, or dispose of in a fire.

Please properly recycle all used batteries.

Time and Date

Time and Date is clearly displayed on the SoundPoint® IP 430 SIP phone. If the phone cannot obtain a time and date from the server, the display will flash. Contact your system administrator if either time or date is incorrect. Users have control over the format of the display and can turn it off. Select options which are right for you as follows:

1. Press **Menu**.
2. Select *Settings* followed by *Basic, Preferences, Time & Date*.
3. Select from *Clock Date, Clock Time, Clock Order* or *Enable / Disable*.
4. Scroll through the options via the up and down arrow keys.
5. Press **Select** to confirm and **Menu** to return directly to the idle display.

Headset Memory Mode

As an option, the headset can be permanently enabled. This is especially useful for regular headset users. To do this:

1. Press **Menu**.
2. Select *Settings* followed by *Basic, Preferences, Headset Memory*.
3. Use the up or down arrows and **Select** soft key to enable Headset Memory Mode.
4. Press **Menu** to return to the main menu.

Subsequent calls to or from this phone using the headset will cause the headset key to flash. Pressing the line keys or the **Answer** soft key to receive a call will now connect to the user's headset automatically.

Repeat steps 1-3 and select *Disabled* to turn Headset Memory Mode off.

Display Contrast

To adjust the contrast on the display to a comfortable level:

1. Press **Menu**. Select *Settings* followed by *Basic, Contrast*.
2. Pressing the **Up** or **Down** soft keys or volume keys will increase or decrease the display contrast.
3. Press the **Ok** or **Cancel** soft keys to accept or reject changes.
4. Press **Menu** or the **Exit** soft key to return to the idle display.

Windows keys

The keyboard has two keys that perform Windows-specific functions.

Key	Description
 Windows key	Pressed alone it returns to the Start screen or to return to the last open app. It can also be used with other keys for special functions, please check Windows Help.
 Application key	This key has the same effect as clicking the right mouse button; it opens the application's context menu.

The Dolby Pro Logic feature and the center and rear speakers (standard) assure full-scale home theater sound. When playing back laser discs or video software that have been specially recorded with four-channel sound (left, right, center, rear) and steering logic (for sound directionality), astonishingly realistic sound surrounds the listener to create a new level of audio/visual entertainment.

Independent control of the four sound channels allows the listener to enjoy the same type of sound reproduction experienced in movie theaters. Voices are reproduced in the front and center sound field, while ambient sounds like cars and crowds are reproduced on all sides of the listener for an incredibly lifelike audio/video experience. Please read the following carefully to "tune" the system's output to match the characteristics of your listening space.

Check the following:

- Before using the DOLBY PRO LOGIC, adjust the proper balance of speaker sound levels.
- Make sure the supplied speakers are properly connected and positioned. (See page 3)
- Make sure the TV set and video unit are properly connected. (See page 4)
- Make sure the laser disc, video tape, etc., support **CD (Compact Disc Digital Audio)**.

ADJUSTING SPEAKER LEVEL BALANCE



The unit is equipped with a built-in test signal generator called a noise sequencer for easy balance adjustment of all four channels. The sequencer outputs a noise signal that "travels" from channel to channel, enabling the simple adjustment of sound level to achieve, at the listening position, the same apparent loudness from each channel.

Use the remote control.


- 1 Press the DOLBY PRO LOGIC button to select **NORMAL**.

If PHANTOM or 3CH LOGIC appears, press the DOLBY PRO LOGIC button repeatedly until NORMAL is selected.

- 2 Press the MANUAL SELECT (TEST) button and hold it down for about four seconds until "L-CH" lights.



A noise signal is sent to each channel in turn in the following sequence:



- 3 Adjust the sound level of the center and the surround speakers.

While "C" or "S" is displayed, press the DOWN **⏮** or UP **⏭** button to adjust the volume of the center or surround speakers to match the level of the left and right speakers.



To adjust the balance between the left and right speakers, use the BALANCE control while "L" or "R" is displayed.

- 4 Press the MANUAL SELECT (TEST) button again to stop the noise signal.

NOTE

If the surround speakers volume of the DSP is changed (See page 7), the DOLBY PRO LOGIC level is also changed.

About the channels

The left and right speakers create the stereo effect.


The center speaker helps achieve precise sound positioning over a broad sound field.

The rear-mounted surround speakers enhance the "depth" of the sound field.

To change the delay time

The surround speakers reproduce sounds a split second after the front speakers. The delay is initially set to 20 ms (milliseconds).

To change this standard delay time, press the MANUAL SELECT (TEST) button on the remote control three times in NORMAL mode (or twice in PHANTOM mode) so that "T" is displayed. Then, press the DOWN **⏮** or UP **⏭** button. Each time one of the buttons is pressed, the delay time changes as shown below.




To change the sound levels after adjusting the balance with the noise sequencer

The sound levels of the center or surround speakers can be adjusted during playback of laser discs or video software.

- 1 Press the MANUAL SELECT (TEST) button on the remote control once or twice to select "C" (center) or "S" (surround).
- 2 While the "C" or "S" is displayed, press the DOWN **⏮** or UP **⏭** button on the remote control to adjust the volume.

Connecting to a TV and a stereo system

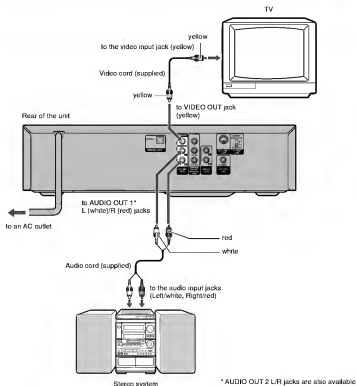

Set the setup menu correctly after connecting

Set the "TV Aspect" in the setup menu according to the TV connected to the unit as follows:
(See "Changing Setup Values" on page 46 for details.)

TV Aspect


When the TV has a conventional 4:3 screen:
4:3 Letterbox or 4:3 Panscan
When the TV has a wide 16:9 screen:
16:9 Wide

CONTINUE

● Specifications

Item	Description
Model	5 Mega-pixel camera
Image sensor	5 Mega (2592x1944 pixels)
Resolution	Still image: 3M/5M 1280x720 (HD) 720x480 (D1) 352x288 (CIF)
Lens	3X optical zoom lens
File format	MOV, JPEG
Video frame rate	1280x720, up to 30fps 720x480, up to 30fps 352x288, up to 30fps
External memory	SD (256MB ~ 4GB), speed rate 12X above
LCD display	2.4" LCD
TV out	Component out, NTSC/PAL system supported
Interface	USB 2.0
Microphone	Yes
Speaker	Yes
Night shot	Yes (both in still image and video modes)
Battery	NP60 compatible Li-ion rechargeable battery


Note: Specifications are subject to change without notification.




- 3) press volume-down key to select "apply update from sdcard" and press power key to confirm or go on upgrading ,



- 4) Then select the SW files , press power key to go on upgrading .then select "reboot system now" to finish the update.



10. In this window, click on the arrow (▼) of 'Look in' box, then select your CD ROM Drive.




Automatic Server Recovery-2 (ASR2)

If there is a critical system failure, Automatic Server Recovery-2 allows you to restart the server and page a designated system administrator. For more information, see the *Compaq Server Online Reference Guide* on the Systems Reference Library CD (SRL).

Security Features

- Power-On Password
- Administrator Password
- Network Server Mode
- Diskette Boot Control
- Power Switch Disable (operating system dependent)
- Serial/Parallel Interface Control
- Remote Access Password

Refer to the *Compaq Server Online Reference Guide* on the Systems Reference Library (SRL) CD for more information on these security features.



- Go to the **Parental control** menu by entering your code.
- Select the **Lock installation** option.
- Press ◀ or ▶ to uncheck the box.
- Press **EXIT** to close the menu.

To unlock the **Time** menu:


- Go to the **Parental control** menu by entering your PIN code.
- Select the **Lock time** option.
- Press ◀ or ▶ to uncheck the box.
- Press **EXIT** to close the menu.

Lock the Installation menu

ⓘ Notes

This function is only available if a code has been defined. When this function is active you need to enter your PIN code to be able to access the **Installation** menu.

1. Press **MENU** on the remote control and select **Features > Parental control > Lock installation**.
2. Press ◀ or ▶ to check the box.



To unlock the **Installation** menu:

Compatibility Modes

Mode	Resolution	(ANALOG)	
		V.Frequency (Hz)	H.Frequency (kHz)
VESA VGA	640 X 350	70	31.5
VESA VGA	640 X 350	85	37.9
VESA VGA	640 X 400	70	31.5
VESA VGA	640 X 400	85	37.9
VESA VGA	640 X 480	80	31.5
VESA VGA	640 X 480	72	37.9
VESA VGA	640 X 480	75	37.5
VESA VGA	640 X 480	85	43.3
VESA VGA	720 X 400	70	31.5
VESA VGA	720 X 400	85	37.9
SVGA	800 X 600	56	35.2
SVGA	800 X 800	60	37.9
SVGA	800 X 600	72	48.1
SVGA	800 X 600	75	46.9
SVGA	800 X 600	85	53.7
* VESA XGA	1024 X 768	43	35.5
* VESA XGA	1024 X 768	60	48.4
* VESA XGA	1024 X 768	70	56.5
* VESA XGA	1024 X 768	75	60.0
* VESA XGA	1024 X 768	85	68.7
MAC LC13"	640 X 480	66.66	34.98
MAC II 13"	640 X 480	66.66	35
MAC 16"	832 X 624	74.55	49.725
* MAC 19"	1024 X 768	75	60.24
MAC G4	640 X 480	60	31.35
MAC G4	640 X 480	120	68.03
* MAC G4	1024 X 768	120	97.09
I MAC DV	640 X 480	117	60
* I MAC DV	1024 X 768	75	60
NEC PC-98 SERIES	640 X 400	56.42	24.83
NEC PC-98 SERIES	640 X 480	70	31.5
NEC PC-98 SERIES	640 X 480	60	31.5
FWJITSU FM-TOWN	640 X 480	55.37	24.37
FWJITSU FM-TOWN	640 X 480	60	31.5

* compression computer image.

Running Options ROMPaq from the Smart Array Controller Support Software CD

1. Place the Smart Array Controller Support Software CD in the server CD-ROM drive.
2. Restart the server.
3. When the **Compaq System Utilities** screen is displayed, select **Run Options ROMPaq** and then press the **Enter** key.
4. When the **Welcome** screen is displayed, press the **Enter** key.
5. On the **Select A Device** screen, select **All Compaq Smart Array *nnnn* Controller(s)** from the list of programmable devices, and then press the **Enter** key.
6. The action that you must now take depends on the message on the screen:
 - If the screen message reads as follows, press the **Enter** key, and then go to step 8 of these instructions:


```
The ROM image files found for the device selected are not  
newer than the current ROM image
```
 - If the ROM firmware currently on the controller is older than that on the Options ROMPaq diskette, then the screen message reads as follows:


```
Device to reprogram:      All Compaq Smart Array nnnn  
Controller(s)  
Controller(s) Current ROM revision: Compaq Smart Array  
nnnn Controller x.xx  
Select Firmware Images:  Compaq Smart Array nnnn  
Controller y.yy
```

In this case, press the **Enter** key and then go to step 7.
7. Review the information on the **Caution** screen, and then press the **Enter** key to reprogram the controller ROM.

The following message is displayed:


```
Reprogramming Firmware
```

Do not interrupt the reprogramming process. You will be notified when reprogramming is complete.

Printer doesn't work

- ☐ Is the printer power turned off?
- ☐ Is the printer cable connected to the correct port (serial or parallel)?
- ☐ Are your application and the printer configured for the same operating values? Be sure there is no conflict with any port on the add-on card. For details, check the documentation that came with your printer.
- ☐ Is the printer out of paper or jammed? Check the printer's status indicator lights.
- ☐ Are the printer cables tangled? To prevent signal interference, neatly fold or coil excess cable length.

Add-on card fails intermittently

- ☐ Do two add-on cards have conflicting addresses? "PnP/PCI Configuration" on page 58 shows where you can see the addresses in the BIOS Setup screen.

If you receive an error message

- ☐ Read the corrective actions listed in "Error Messages" on page 19.